


Use instruction
 A: Please Follow the instructions, properly install the water supply tube and drain tube for the equipment, and reserving additional space of 10mm at the installation site to make the installation requirements. (Air cooling equipment needs more space to meet the air flow and heat discharge.
 B: The cooling effect depends on the heat dissipation environment, please keep ventilation

使用说明
 A: 请按照说明书, 正确安装、摆放设备, 连接供水、排水管。在安装现场预留10mm额外空间, 以满足安装要求。(风冷设备, 需要更多的空间以满足空气流通和热量排出)
 B: 制冷效果取决于散热环境, 请保持通风

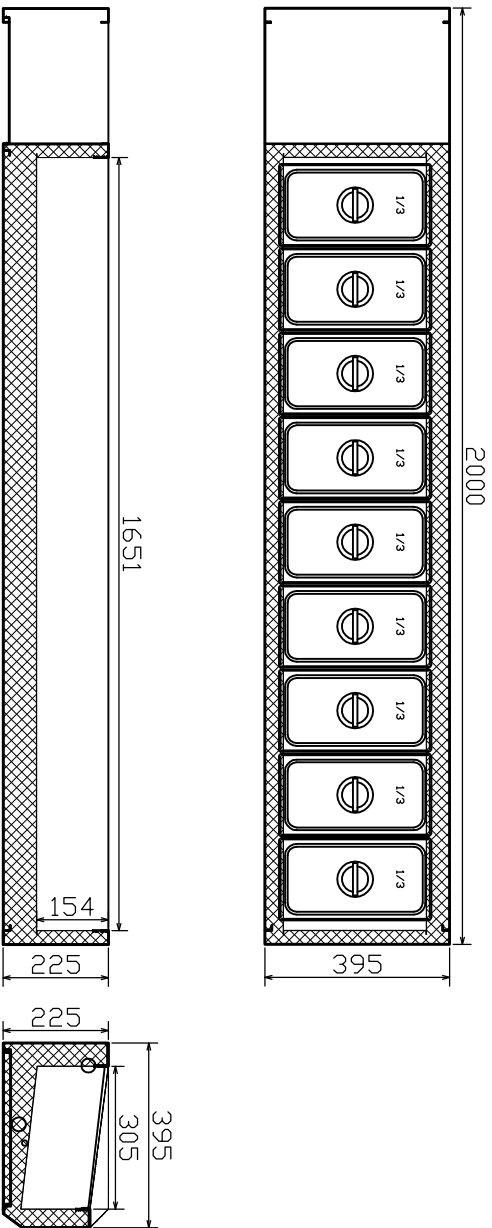

Item 名称	2.0m desktop salad cabinet 2.0米台式沙拉柜
Model 型号	CT-200/G
Dimension 外形尺寸	2000*395*225
Voltage 电源	220V/50Hz
Power 额定功率	240W
Temperature Range 温度	2~8°C
Cooling Type 制冷方式	Direct cooling 直冷
Capacity 容积	77L
Material 材质	Interior内胆: 304 Top 台面: 304
Refrigerant Type 制冷剂类型	R134a
Refrigerant Throttling Mode 制冷剂节流方式	Capillary 毛细管
Keep Temp Material 保温物料	Cyclopentane 环戊烷
Defrost Water 化霜水	/
Compressor Type 压缩机类型	Enclosed unit 全封闭式
Condensing System 冷凝器类型	Forced air cooling 强制风冷
Evaporating Fan 蒸发器风机	/
Temperature Controller 温控	Pc board 电脑版
Defrost Time 除霜时间	Every four hour 每隔4小时一次
Compressor work temp 压缩机启动温度	4°C
Compressor protection type 压缩机保护方式	High temperature protection 高压保护
Wattage safety type 电源保护方式	Voltage changer/transformer 变压器
Heat Dissipation Type 散热方式	Front air inlet and back venting refrigeration system 前吸后排风
Shelves 层架	/
Light 灯光	6500K
Condensing Unit 机组	Self-Contained 一体机
Electrical Protection 电源保护方式	6.3a Fuse Wire 6.3A保险丝
Insulation Layer Thickness 保温层厚度	Cabinet 65mm 箱体65mm; Door 55mm 门55mm
Using Temp 使用温度	1~43°C
Packing Size 包装尺寸	/
N.W./G.W./净重/毛重	/

Approved by European CE and CB
 已通过CE、CB认证。

HISAKAGE®

2.0m desktop salad cabinet
2.0米台式沙拉柜

CT-200/G

视图方向
View Orientation

Over Look View
俯视图
Front View

Rear View
后视图
Catalog View
侧视图

Revise Date 修订日期
2019-1-17

Make Date 制图日期
2018-10-8

REV
A